

We test, You produce

F670

LEAK TEST INSTRUMENT FOR INDUSTRIAL QUALITY CONTROL


After 45 years, and 150,000 testers installed in more than 5,000 customers worldwide, ATEQ presents its revolutionary leak tester in an industrial 19" 3U format: **F670**.

New electronic module, new measurement module, new interface, new accessories... All has been made to improve your quality control.

And yet, inside can be found the latest leak testing technics and technology that will guarantee you the fastest and most accurate leak testing cycle on the market.

Highlights

- LARGE COLOR DISPLAY
- MAXIMUM PERFORMANCE
- MULTIPLE COMMUNICATION

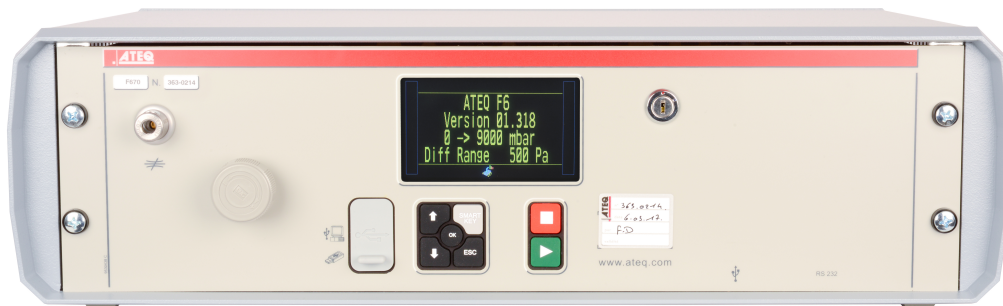

Applications

Automotive, domestic appliances, medical, aeronautic, defense, fluid and electrical components, food and cosmetic packaging...



F670

LEAK TEST INSTRUMENT

FOR INDUSTRIAL QUALITY CONTROL

Main Features

- Differential pressure decay leak measurement.
- Large range of leak measurement (ΔP) F.S.: 50 Pa, 500 Pa or 5000 Pa
- Mechanical or electronic regulator from vacuum to 20 bar
- 128 programs
- setting on line (via USB)
- 2 languages (English + other one)
- Manual calibration on front panel with calibrated leak
- Data storage on internal memory or USB key

ENVIRONMENT

- ROHS standard

TEST MODES

- ΔP (Pa, 1/10 Pa)
- $\Delta P/t$ (Pa/s, 1/10 Pa/s)
- Flow units (sccm, mm³/s, cm³/s, cm³/min, cm³/h...)
- Blockage test
- Burst test
- Sealed components test
- and others, depending on your applications

FLEXIBLE COMMUNICATION FORMAT

- RS232: printer, modbus RTU
- Slave USB: PC supervision (WinAteq 300, sesame)
- Master USB: USB key to transfert (parameters, results, ...)
- Option Fieldbus: profibus, devicenet, profinet, Ethernet/IP

Measurement Characteristics

| PRESSURE DROP MEASUREMENT | | |
|---------------------------|---|--------------------|
| RANGE | ACCURACY* | MAXIMUM RESOLUTION |
| 50 Pa | $\pm(1.0\% \text{ Reading} + 0.5 \text{ Pa})$ | 0.1 Pa |
| 500 Pa | $\pm(0.5\% \text{ Reading} + 0.5 \text{ Pa})$ | 0.1 Pa |
| 5000 Pa | $\pm(0.5\% \text{ Reading} + 5 \text{ Pa})$ | 1 Pa |

Accuracy: linearity + repeatability + hysteresis
 *Optional laboratory accuracy available

Technical Specifications

| | |
|-------------------|---|
| Physical | Weight: 7 Kg Dimensions: (WxHxD) 537x157x380 mm |
| Interface | Graphic color screen with simple and intuitive menu-driven operator controls SMART KEY: programmable key with user's functions |
| Electrical supply | 24 V DC/2A or 100- 240 V AC / 50W |
| Air supply | Command 4/6 bar Pressure 1 or 2 bar > test pressure Clean and dry air Air quality standard to be applied (ISO 8573-1) |
| Temperature | Operating: +5°C to +45°C Storage: 0°C to +60°C |

Options

- 9 inputs / 5 local outputs compatible with 5 series instruments
- 6 inputs/ 6 outputs 24 V programmable for external automation
- Electronic regulator
- Dual pressure
- Automatic calibration check
- 2 pneumatic outputs for control of sealing connectors
- Memory card for archiving results (1 millions)

Accessories

- Simple remote control TLC60 connection I/O
- Advanced remote control TLC600 connection master USB
- USB key for parameters access
- Y valve
- WinAteq 300 software
- Leak calibrator
- Master leak
- Connectors...



Remote Control



F620 compact case

→ OTHER FORMATS
F610 waterproof case



ATEQ

